

ZBGF-C 干式复合机/无溶剂复合机

Dry lamination machine
Solventless lamination machine

PRINTING SPEED
200/400
m/min



主要技术参数 Main Technical Parameters

复合材料	Laminating material	塑料薄膜、纸张、铝箔等卷筒材料 Plastic film, paper, aluminum foil
复合宽度	Laminating width	850mm, 1050mm, 1250mm
机械速度	Machine speed	200/400m/min
收放卷直径	Max. unwinder/rewinder diameter	Φ600mm, Φ800mm
干燥箱长度	Drying length	9000mm

ZBFQ-E600 高速分切机

Slitting machine

PRINTING SPEED
400-600
m/min



主要技术参数 Main Technical Parameters

型号	Model	ZBFQ-1150-1550
适应幅宽	Slitting width	1300mm(最大Max1500mm)
放卷直径	Diameter Of Unwinding	最大MaxΦ800mm or Φ1200mm
材料厚度	Thickness Of Material	20μm-200μm
收卷直径	Diameter Of Rewinding	最大MaxΦ800mm
收卷宽度	Minimum slitting width	最小Min30mm
分切速度	Working Speed	最大Max400/600m/min(伺服)

ABOUT ZONBON

关于中邦

Wenzhou ZhongMing Machinery Co.,Ltd. is a company specializing in the production of flexible packaging equipment and related equipment manufacturers, has a research and development, study a variety of mature manufacturing equipment and excellent performance of non-standard equipment.

We are specialized in the production of computer gravure printing presses, non-standard coating compound machines, various use cutting machines and PTP pharmaceutical packaging materials, special paper processing and other production lines.

The products sell well across the country and export to Europe, Africa, Middle East and southeast Asia.

The company since its inception, the complete processing equipment, processing equipment, relying on scientific and technological progress, the introduction of new and high technology, is committed to research and development of new products and technological transformation, and absorb the essence of similar products at home and abroad, for the general customers to provide better products.

At the same time, we provide first-class technology transfer and after-sales service and professional technical consultation, so that customers can get the ideal "productivity" to achieve the ultimate goal of investment.

温州市中铭机械有限公司是一家专业生产软包装成套设备及相关设备的厂家，具有研发，研究制造多种成熟设备及性价比优异非标设备的能力。专业生产电脑凹版印刷机、非标涂布复合机、各类用途分切机以及 PTP 药用包装材料、特种纸加工等生产线。产品畅销全国各地，并出口欧洲、非洲、中东、及东南亚各国。

公司自创办以来，加工设备齐全，工艺设备完善，依靠科技进步，引进高新技术，致力于研究开发新产品及技术改造，并吸取国内外同类产品之精华，为广大客户提供更好产品。同时提供一流的技术转移与售后服务以及专业技术咨询，使客户得到理想的“生产力”，以达到投资的最终目的。

ZONBON

温州市中铭机械有限公司 (中邦)

WENZHOU ZHONGMING MACHINERY CO.,LTD.

地址：中国温州市平阳万全工业区
电话：+86 577 63170288
传真：+86 577 63170277
网址：www.zonbonmachine.com

A Wanzhou Industrial District(PingYang, Wenzhou, China)
T +86 577 63170288
F +86 577 63170277
W www.zonbonmachine.com



+86 15958766608



+86 18057736999



扫一扫，了解更多

ZONBON

www.chinazonbon.com

软包装方案解决专家 专注印刷包装机械制造20多年

Flexible packaging solution expert,
Specializing in printing and packaging
machinery manufacturing for over 20 years

中国·浙江·温州

Wenzhou City, Zhejiang Province, China



中邦机械
Zonbon Machinery

ELS-500 电子轴传动凹版印刷机

ELS Rotogravure printing machine

PRINTING SPEED
420
m/min



性能特点 Function and Characteristic

收放卷：外置圆盘式双工位收放料架，稳定性强，气胀袖带安全卡盘装卸料卷，换卷自动裁切，收放卷水平直线式裁刀，能正、反裁切，带收卷压辊装置；超声波卷径检测系统；
印刷：整机采用高精度无齿隙日本伺服驱动，无轴气顶装版，纵、横向自动套色及预套准装置，不改变料长的直压机构，油墨辊转移上置装置，提高套印精度，减少废品损失。刮刀驱动为双轴驱动式，快换式刮刀，独立电机控制；三方位可调节封闭式刮刀，独立装版、供墨一体化小车；
干燥：智能化控制的独立高效烘干系统，形成大风量、高压风高效节能效果，多位回风路，在整幅面有旋风布局。集中触摸屏控制及监视整机工作状态，具有完备的安全保护功能，能够智能识别整机工作状态及判断故障；
整机：采用进口PLC控制的伺服电机张力控制系统，定量集中润滑系统，确保导辊高速运转灵活性。

Unwinder and Rewinder: Cantilever turret disk-type whirling stand with double arm & double station, Web material rolled with air shaft with safety chuck. Automatic web roll exchange With horizontal cutting device in obverse or reverse direction With press roll device. Ultrasonic detection system of coil diameter.
Printing: High precision and no backlash servo driver (Japan) shaftless pneumatic cone. Horizontal & vertical register system, also with pre-register and vertical pressing mechanism. Ink is passed by ink transfer roll, reduce the loss of waste and improve precision. Doctor blade plays with double-axis, drive by independent motor, also quick-changing. Adjustable closed blade in three sections. Loading and ink supplying trolley.
Dryer: Intelligent separately high efficiency oven system. Low consumption oven with high air volume and pressure, multi-return and whirlwind distributed. Touch screen control and surveillance system. The perfect security system helps watching working condition and estimate machine bug.
Control: Machine is logically controlled by PLC, servo drive tension control. All guide rolls are oiled together, to keep rolls, high flexibility.

主要技术参数 Main Technical Parameters

有效印刷宽度	Printing Width	1000mm
基材最大宽度	Max. Width of Web	1050mm
机械最高速度	Max. Machine Speed	500m/min
收放卷最大直径	Max. Diameter of Unwind/rewind	Φ800-800mm
基材卷芯内径	Inside Diameter of Roll Core	Φ78mm
印刷版辊直径	Diameter of Printing Cylinder	Φ120-Φ380mm
套准精度	Accuracy of Computer Registration	±0.1mm
张力控制范围	Tension Control Range	20-50kg/Full Width
烘箱加热功率	Heating Power of Oven	240Kw
机器总功率	Total Power	300Kw
机器重量	Weight of Machine	50000kg
外形尺寸	Overall Dimension(L*W*H)	23000*5600*4600mm

ELS-400 电子轴凹版印刷机
ELS Rotogravure Printing Machine

PRINTING SPEED
350
m/min



主要技术参数 Main Technical Parameters

印刷材料	Printing Material	BOPP, PET, PVC, PE, NY	BOPP, PET, PVC, PE, NY	BOPP, PET, PVC, PE, NY
印刷宽度	Printing Width	800mm	800mm	800mm
机械速度	Mechine Speed	400m/min	400m/min	400m/min
套色精度	Color Register Accuracy	±0.1mm	±0.1mm	±0.1mm
印版直径	Plate Cylinder	Φ120-300mm	Φ120-300mm	Φ120-300mm
收放卷直径	Unwind/Rewind Dia	Φ600-800mm	Φ600-800mm	Φ600-800mm
机器型号	Machine Model	850mm	850mm	1050mm
总功率	Total Power	200kw	220kw	235kw
外形尺寸	Overall Dimension	2000*4200*4200mm	2000*4400*4200mm	2000*4600*4200mm

ZBAY-8-1050F 电脑套色凹版印刷机 (七电机/电子轴)
Rotogravure Printing Machine (MLS/ELS)

PRINTING SPEED
230
m/min



主要技术参数 Main Technical Parameters

有效印刷宽度	Printing Width	1000mm
基材最大宽度	Material Width	1050mm
机械最高速度	Mechine Speed	180-230m/min
收放卷最大直径	Max. Diameter of Unwind/Rewind	Φ600-800mm
印刷版直径	Diameter of Printing Cylinder	Φ120-Φ380mm
套准精度	Accuracy of Computer Registration	±0.1mm
机器总功率	Total Power	205kw
外形尺寸	Overall Dimension(L*W*H)	17800*3800*3500mm

ZBJP-1150-1350 品检复卷机
Inspecting Machine

PRINTING SPEED
300-400
m/min




主要技术参数 Main Technical Parameters

型号	Model	ZBJP-1150-1350
机械速度	Mechine speed	400m/min
复卷宽度	Max. web width	1100-1300mm
收放卷直径	Max. unwinder-rewinder diameter	Φ800
检品方式	Inspecting mehod	频闪灯 Stroboscope 可配在线检测

ZBFQ-1150-1550EL 数字控制高速分切机
Slitting Machine

PRINTING SPEED
500
m/min

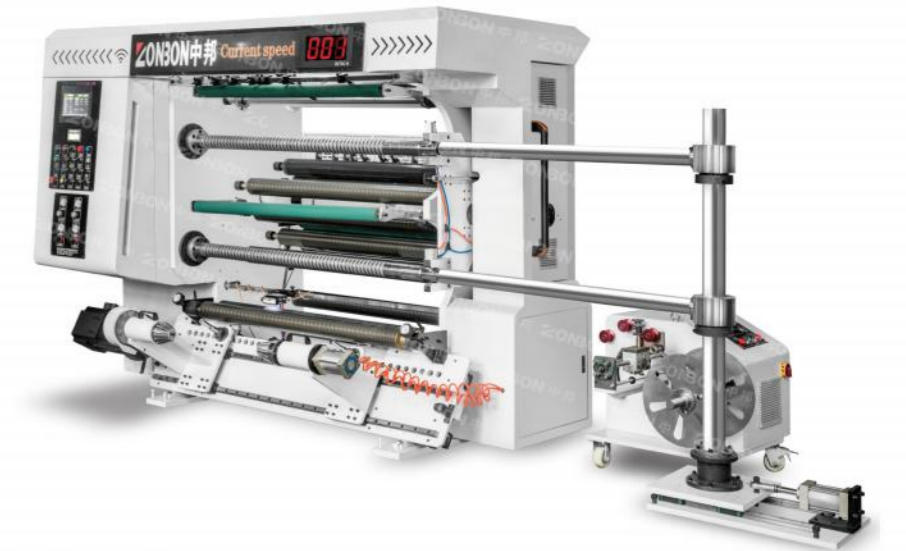

主要技术参数 Main Technical Parameters

型号	Model	ZBFQ-1150-1550E
适应幅宽	Material width	1300mm(最大Max1500mm)
放卷直径	Diameter Of Unwinding	600mm
材料厚度	Thickness Of Material	20 μm-200 μm
收卷直径	Diameter Of Rewinding	450mm
收卷宽度	Minimum width of cut product	最小Min30mm
分切速度	Working Speed	500mm
		最大Max500m/min(变频)

ELS-300 电子轴凹版印刷机
ELS Rotogravure Printing Machine

PRINTING SPEED
280
m/min



主要技术参数 Main Technical Parameters

印刷材料	Printing Material	BOPP, PET, PVC, PE, NY	BOPP, PET, PVC, PE, NY	BOPP, PET, PVC, PE, NY
印刷宽度	Printing Width	800mm	800mm	1000mm
机械速度	Mechine Speed	300m/min	300m/min	300m/min
套色精度	Color Register Accuracy	±0.1mm	±0.1mm	±0.1mm
印版直径	Plate Cylinder	Φ120-300mm	Φ120-300mm	Φ120-300mm
收放卷直径	Unwind/Rewind Dia	Φ600-800mm	Φ600-800mm	Φ600-800mm
机器型号	Machine Model	850mm	850mm	1050mm
总功率	Total Power	200kw	220kw	235kw
外形尺寸	Overall Dimension	18800*3600*3700mm	18800*3800*3700mm	18800*4000*3700mm

ZBAY-C 电脑套色凹版印刷机 (选配: 三电机/七电机)
Rotogravure Printing Machine (Option: Three/Seven Motor)

PRINTING SPEED
180
m/min



主要技术参数 Main Technical Parameters

机型	Model	ZBAY-850C	ZBAY-1050C	ZBAY-1250C
基材最大宽度	Printing Width	800mm	1000mm	1200mm
机械最高速度	Mechine Speed	180m/min	180m/min	180m/min
收放卷最大直径	Max. Diameter of Unwind/rewind	Φ600mm	Φ600mm	Φ600mm
印刷版直径	Diameter of Printing Cylinder	Φ100~350mm	Φ100~350mm	Φ100~350mm
套准精度	Accuracy of Computer Registration	±0.1mm	±0.1mm	±0.1mm
机器总功率	Total Power	110kw	115kw	120kw
外形尺寸	Overall Dimension(L*W*H)	15800*3500*3100mm	15800*3700*3100mm	15800*3900*3100mm

ZBGF-F 高速干式复合机
HIGH speed dry laminating machine

PRINTING SPEED
300
m/min




主要技术参数 Main Technical Parameters

型号	Model	ZBGF-850F	ZBGF-1050F	ZBGF-1250F
复合材料	Laminating material	BOPP, PET, PVC, PE, NY	BOPP, PET, PVC, PE, NY	BOPP, PET, PVC, PE, NY
复合宽度	Laminating width	450mm-1050mm	450mm-1050mm	450mm-1050mm
机械速度	Mechine speed	300m/min	300m/min	300m/min
放卷直径	Unwind web dia	Φ600-Φ800mm	Φ600-Φ800mm	Φ600-Φ800mm
收卷直径	Rewind web dia	Φ600-Φ800mm	Φ600-Φ800mm	Φ600-Φ800mm
机器型号	Machine model	850mm	1050mm	1250mm
烘箱长度	Oven length	10000mm	10000mm	10000mm

ZBZD 三边封制袋机 (方底袋制袋机/自立拉链制袋机)
Three-sided seal, center seal, four-sided seal bagging machines
Self-standing Zipper Bag Making Machine
Square bottom bag machines (Flat Bottom Pouch Machine)

PRINTING SPEED
100-200
m/min

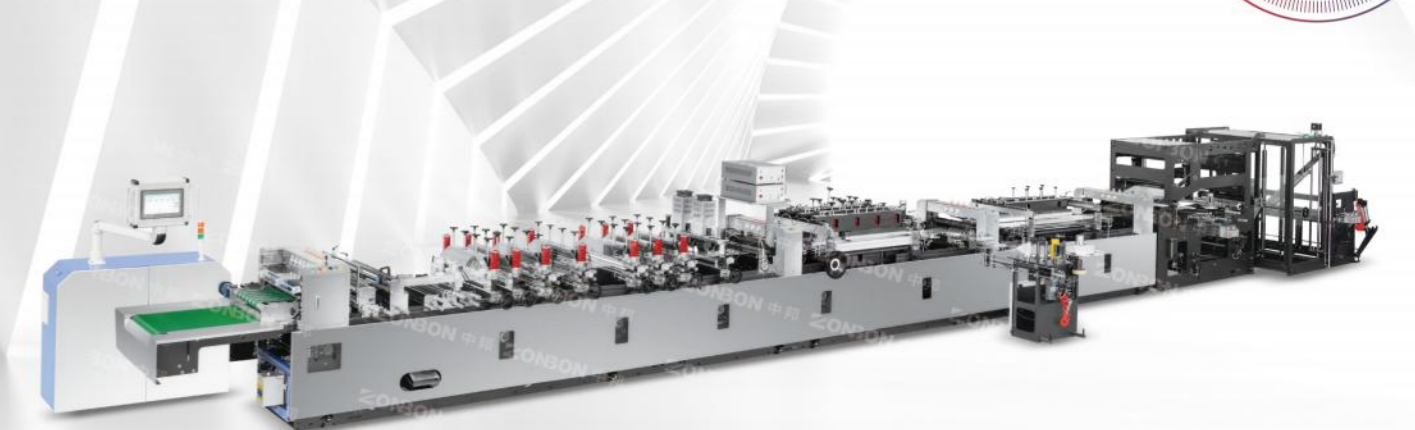

主要技术参数 Main Technical Parameters

机型	Type	Three-sided seal, center seal, four-sided seal bagging machines	Self-standing Zipper Bag Making Machine	Square bottom bag machines
基材最大宽度	Max. Diameter of Roll Material	Φ600	Φ600	Φ600
机械最高速度	Max. Width of Roll Material	1250mm	1250mm	1250mm
制袋速度	Max. Speed	180-200pcs/min	100-200pcs/min	80-200pcs/min
最大送料速度	Max. Machine Speed	40m/min	40m/min	40m/min
总功率	Total Power	45kw	80kw	90kw
机器重量	Weight of Machine	5000kg	8000kg	10000kg
外形尺寸	Overall Dimension(L*W*H)	9000*2000*1870mm	12500*2000*1870mm	23000*2500*2000mm